

This MIKEL scaffold sheeting is extremely suitable for working comfortably and safely on the scaffold. The UV stabilisation offers long-term protection against all weather. The webbings and the flexibility of the quality enable this sheeting to be attached easily. The flame retardant execution in white colour is unique.


This MIKEL scaffold sheeting is in length direction equipped with several webbings with pre-punched holes at 10-cm intervals. One side has been equipped with double webbing, which also enables the tarp to attach to scaffolding widths of 2,07m, 2,57m and 3,07m (Layher system) .

In not less than 11 sizes available from stock. Upon request also available in bale packing or on rolls.




Material base fabric	PP
Material coating	LDPE
Fabric weight	170 gsm
Tarpaulin weight	185-200 gsm
Gross weight	200-215 gsm
Colours	p.t.o.
Size	finished size
Pre-punched holes ø 15 mm	10 cm
Tensile strength	700 N/5cm
Tear resistance	100 N
Tear resistance reinforcement strips	600 N
Temperature range	-40/+80°C
UV**	100 Kly
Light transmission	70 %
Light transmission FR	32 %
** not for FR execution	

Size	Box quantity	Pallet* quantity
0,80m x 20m	4	84
1,10m x 20m	2	66
1,70m x 20m	2	42
2,20m x 20m	2	36
2,70m x 10m	2	54
2,70m x 20m !	1	27
3,20m x 10m	2	48
3,20m x 20m !	1	24
4,10m x 20m	1	18
* ± 80cm x 120cm x 120cm		
Size	Quantity	Pallet quantity
2,00m x 45m !	1 roll	39
3,00m x 45m	1 roll	18
! also available in flame-retardant execution (FR)		

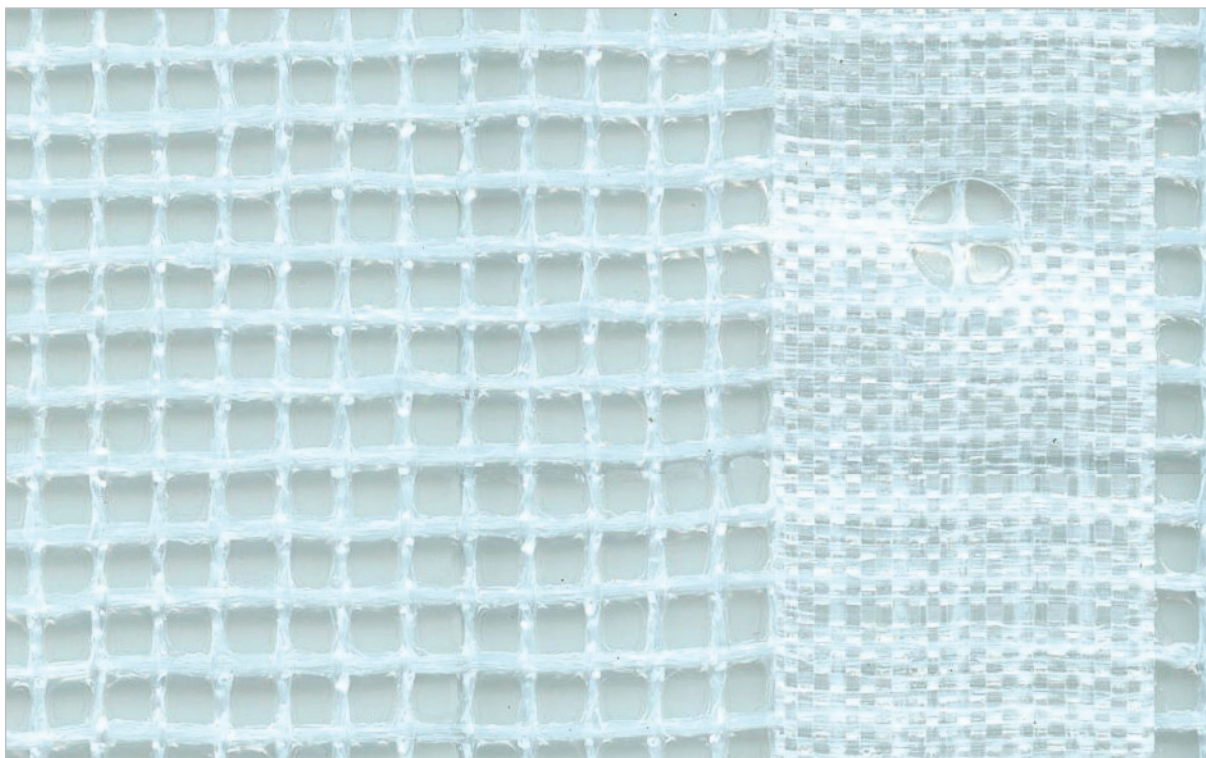

*transparent*

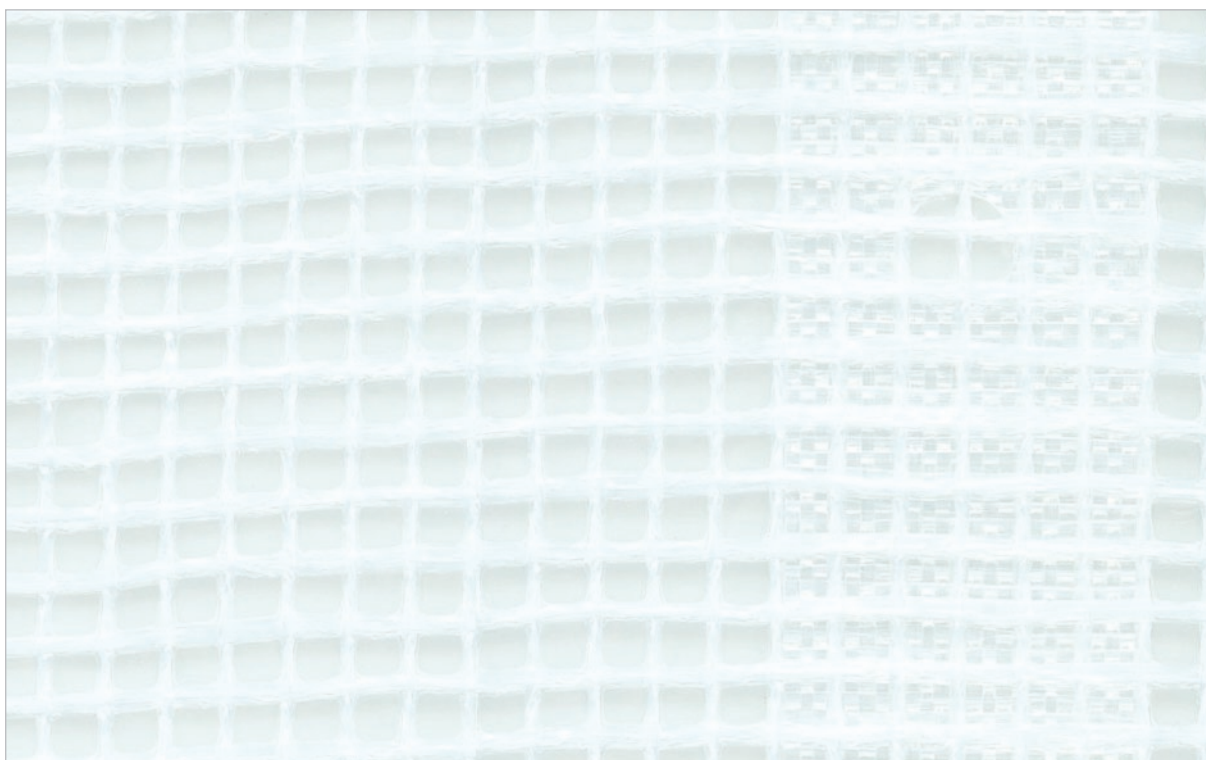

*white FR*